



SX-10 PACKAGE

KEY FEATURES:

- Tier 4 Cummins Turbo Diesel 180 HP 4 cylinder
- Hydraulic slide-out for additional workspace
- Hydraulic leveling cylinders, guarded by serrated dozer teeth
- Custom lighting, fuel tank, safety railings, and pony walls
- Air-cooled hydraulics system
- AVD rod handler
- Hydraulic tilt rod rack
- Levelwind winch
- 24" mast dump
- Full guarding package
- Removable skids

DRILL SPECIFICATIONS

ENGINE	Tier 4 Cummins Turbo Diesel 180 Horsepower 4-cylinder
HYDRAULIC SYSTEM	Air-cooled hydraulics system Hydraulic pilot controls Splitter box pump drive system Rexroth and Kawasaki triple pump design Synchronized head and foot clamp with options to isolate functions
FEED FRAME	UHMW slide saddle 24" mast dump Proprietary feed frame design internally reinforced 45,000 lbs pull back double ram 45 to 90 degree operational angle
WIRELINE ASSEMBLIES	Level wind winch 1,500m 3/16" wireline capacity Rotzler swivel rod hoist
HEAD & FOOT CLAMP	P or H heads available P foot clamp
GUARDING	Full guarding package available for all applications Interlock switch for safe drilling operation

FEATURES



Engineered feed frame




24" mast dump sub frame




Levelwind winch



Aluminum components

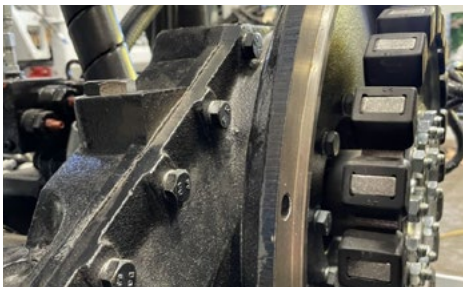

Pump drive

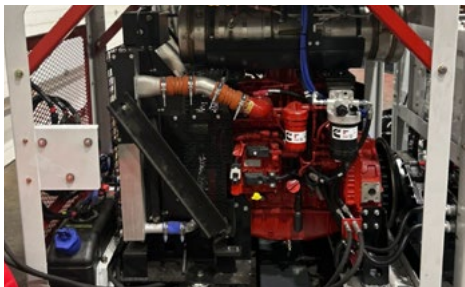

Engine options

PLATFORM SPECIFICATIONS

GUARDING	Integrated rolling with interlock
FUEL CAPACITY	250L double-walled fuel tank
ROD CAPACITY	1,700m of NQ in 9m lengths
WEIGHT	33,000 lbs
DIMENSIONS	Shipping: 310" long x 137" wide x 138 " tall Operational: 359" long x 221" wide x 151" tall
MUD SYSTEM	650L bottom tank with slide-in mixer 450L top tank with slide-in mixer 435 pump mount is integrated directly into the shack

FEATURES



Integrated drill
mounts & drip tray



Leveling cylinders
with teeth



Reinforced
skidbase



Hydraulic slide-out
for additional
workspace



Interior/exterior
full led light
package



Integrated guard
system



Ladder and guard
rails package



Rod handling and
stacking system

OPTIONS

- Wire and mount 6) LED lights with switch and GFI outlet
- Wire and mount 8) LED flood lights on exterior corners for shack
- Removable railings outside of roof with kick plate
- Ladder cage with spring hinge door for ladder access
- Levelling cylinders with counter balance
- Leveling cylinder valve bank and hoses plumbed into shack
- Hand rails for hitch extensions
- Aluminum stair set for hitch
- Integrated rolling guard system
- Rooftop lifeline for lanyard
- Hitch wings
- 3 E-stop switches
- 435 Supply pump, hydraulic motor, coupling hydraulic lines plumbed in
- 2nd mud tank with mixers dual flow control (1st mud tanks and mixer on drill quote)
- Safe sleeve hydraulic hose cover for rod handler and drill shack
- Hydraulic tilt roof panel for rod stacking area
- Three aluminum, hinging roof panels for drill opening
- Wall insulation (laser cut holes on all panels and aluminum interior panels)
- Ceiling Insulation (laser cut holes on all panels with aluminum interior panels)

